

Effective medium theory of negative index composite metamaterials

A.I. Căbuz, D. Felbacq and D. Cassagne

Groupe d'Etude des Semiconducteurs UMR CNRS-UM2 5650, CC074,
Université Montpellier II, Pl. E. Bataillon, F-34095 Montpellier Cedex 05, France

In the homogenization of composite metamaterials the role played by the relative positions of the wires and resonators is not well understood, though essential. We present a general argument which shows that the homogenization of such metamaterials can be seen as the homogenization of 1D single negative stacks. The sensitivity to the geometrical parameters is due to the fact that light sees the harmonic mean of the dielectric constant when propagating parallel to the layers. Since the dielectric constant is not positive definite the harmonic mean is *not bounded* and presents abrupt variations. We discuss applications of this remarkable phenomenon.

Meta-materials with a possibly negative index of refraction have been under intense study since the results of Pendry [1, 2] suggested that they might be fabricated by interspersing metallic wires (giving an effective negative permittivity) with magnetic resonators such as split rings or dielectric fibers (giving an effective negative permeability). However the details of the exact way in which these two effects mix and perturb each other are not well understood. In this letter we present an effective medium theory that accounts quantitatively for this behavior, provides an explicit geometrical recipe for obtaining true negative index media and opens the way to new applications.

No general argument exists that by mixing magnetic resonators and wires one must obtain a negative index material at some frequency. Indeed, as the results of Pokrovsky and Efros have shown [3], the negative epsilon effect of metallic gratings is fragile with respect to the brutal mixing of the metallic wires with other objects. Negative epsilon is essentially an interference phenomenon and anything that perturbs the interference of the waves scattered by neighboring wires is liable to destroy it. The wires need to “see” each other. The results of Pokrovsky and Efros are the first indication that the effective medium depends critically on the microscopic geometry [4]. They essentially tell us that resonators should not be placed in between the wires, or the aggregate may lose its negative permittivity. The regions occupied by the wires must have higher connectivity, and the simplest way of achieving this is a stack of alternating rows of wires and resonators. Each row of wires will then act as a homogeneous slab with negative permittivity ($\epsilon = 1 - \frac{\omega_{ep}^2}{\omega^2}$ and $\omega_{ep} = \frac{2\pi c_0^2}{a^2 \ln(a/r)}$ [1, 5]), and each row of resonators will act as a homogeneous slab with negative permeability ($\mu = 1 - \frac{a\omega^2}{\omega_{mp}^2}$, with a and ω_{mp} determined by the geometry [2, 6]). We thereby arrive at the remarkable and quite general conclusion that the homogenization of complex wire/resonator composites is the homogenization of 1D stacks of alternating single negative homogeneous slabs. This conclusion is a direct consequence of the fact that the negative permittivity of wire gratings depends critically on their mutual interferences, in contrast to the negative permeability effect which is es-

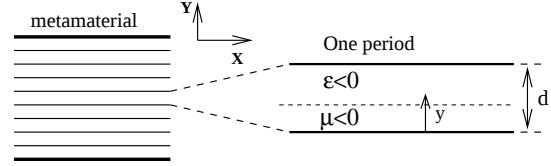


Figure 1: The structure we study is a 1D periodic medium with a unit cell composed of two layers, one with negative ϵ (and positive μ), one with negative μ (and positive ϵ). The $\mathbf{H}$ field is directed in the Z direction and the incident field is directed upwards.

entially a resonance phenomenon and does not depend critically on the coupling between neighboring resonators [5, 7].

However, while some interesting results on 1D single negative media have been published [8, 9, 10], the natural question of the precise conditions under which such structures can be homogenized to obtain a negative index medium has not been satisfactorily answered.

In this work we offer a rigorous self-contained homogenization analysis that gives a clear description of the 1D alternating single negative medium described above and pictured schematically in Figure 1. We shall use the term “ $P \cdot k$ negative” to unambiguously refer to waves or homogeneous materials that may support waves which have a dot product of the Poynting vector and wave vector that is negative.

The discriminating factor, as in any homogenization problem, is the ratio between the wavelength and the period of the structure. In our case a complication is introduced by the extreme dispersion of resonator behavior, but we avoid it by fixing the wavelength (and therefore the internal resonator geometry) and scaling the *relative placement* of wires and resonators. The discriminating geometrical parameter of the homogeneous model is therefore the ratio $r = \frac{\lambda}{d}$ where λ is the free space wavelength and d is the period. This parameter is, a priori, large, which authorizes us to use the well-established *two-scale expansion* approach. In the following we treat only the $\mathbf{H}$ polarization case. The results hold in $\mathbf{E}$ polarization as well, provided we exchange μ and ϵ everywhere.

We note the macroscopic variables with capital letters X and Y and the microscopic variable with the small letter y as in Fig. 1. We first need to introduce the small parameter $\eta = d/\lambda$ which will be used in the expansion. Next we define the microscopic variable $y = \frac{Y}{\eta}$ which varies fast, η being small, so it describes the system on the microscopic scale, the scale of an individual layer. Since we are interested in the homogeneous behavior of the system, at the end of the analysis this variable will be averaged over and will disappear. It can be regarded as an internal degree of freedom of the unit cell.

For a 1D structure with piecewise continuous $\varepsilon(Y)$ and $\mu(Y)$ Maxwell's equations can be written as

$$\frac{d}{dY} \left(\frac{1}{\varepsilon(Y)} \frac{dU}{dY} \right) + \left(k^2 \mu(Y) - \frac{k^2 \sin^2(\theta)}{\varepsilon(Y)} \right) U(Y) = 0 \quad (1)$$

where $H(Y) = U(Y, y) e^{ikx \sin(\theta)}$, $k = 2\pi/\lambda$, θ is the angle of incidence in the $z = 0$ plane and where we will note $k^2 \sin^2(\theta) = k_X^2$ below. This second order differential equation can be written as a system of two first order equations

$$\xi = \frac{1}{\varepsilon} \frac{dU}{dY} \quad (2)$$

$$\frac{d\xi}{dY} + \left(k^2 \mu - \frac{k_X^2}{\varepsilon} \right) U = 0 \quad (3)$$

where we have introduced the new variable ξ defined by equation 2 and where special care must be taken with the derivative operator as it now takes the form

$$\frac{d}{dY} = \frac{\partial}{\partial Y} + \frac{1}{\eta} \frac{\partial}{\partial y}. \quad (4)$$

We develop the quantities of interest in multi-scale series with parameter η

$$\begin{aligned} U(Y) &= U_0(Y, y) + \eta U_1(Y, y) + \dots \\ \xi(Y) &= \xi_0(Y, y) + \eta \xi_1(Y, y) + \dots \end{aligned} \quad (5)$$

and insert them into equations 2 and 3. Note that all quantities on the right side of the equations must be periodic in y with period d . By identifying same order terms in η we obtain the following relations. From Eq. 2 we obtain

$$\frac{\partial U_0}{\partial y} = 0 \quad \text{and} \quad \varepsilon \xi_0 = \frac{\partial U_0}{\partial Y} + \frac{\partial U_1}{\partial y} \quad (6)$$

while from Eq. 3 we obtain

$$\frac{\partial \xi_0}{\partial y} = 0 \quad \text{and} \quad \frac{\partial \xi_0}{\partial Y} + \frac{\partial \xi_1}{\partial y} + \left(k^2 \mu - \frac{k_X^2}{\varepsilon} \right) U_0 = 0. \quad (7)$$

We notice that the zeroth order terms of the U and ξ expansions do not depend on y , the microscopic variable. However the first order terms do depend on it and are periodic of period d as noted above. This must be kept

in mind as we proceed to average the equations (to obtain the homogeneous behavior of the fields) because the derivative of any continuous periodic function averages to zero. We note the average over y of a quantity f as $\langle f \rangle = \frac{1}{d} \int_0^d f(y) dy$.

Taking the average of 6 and 7 the y derivatives disappear as explained above and we get

$$\langle \varepsilon \rangle \xi_0 = \frac{\partial U_0}{\partial Y}$$

$$\frac{\partial \xi_0}{\partial Y} + \left(k^2 \langle \mu \rangle - \left\langle \frac{1}{\varepsilon} \right\rangle k_X^2 \right) U_0 = 0. \quad (8)$$

which we put back together into one second order equation

$$\frac{\partial^2 U_0}{\partial Y^2} + \left(k^2 \langle \varepsilon \rangle \langle \mu \rangle - \frac{\langle \varepsilon \rangle}{\langle \varepsilon^{-1} \rangle^{-1}} k_X^2 \right) U_0 = 0.$$

The quantity in parentheses is the propagation constant in the Y direction, k_Y^2 and we thus obtain the dispersion relation of the homogeneous medium:

$$\frac{k_X^2}{\varepsilon_Y} + \frac{k_Y^2}{\varepsilon_X} = k^2 \mu_{\text{eff}} \quad \text{where} \quad (9)$$

$$\mu_{\text{eff}} = \langle \mu \rangle, \quad \varepsilon_X = \langle \varepsilon \rangle, \quad \varepsilon_Y = \langle \varepsilon^{-1} \rangle^{-1}. \quad (10)$$

The relations 10 summarize the effective medium model and the rest of the letter is concerned with exploring their consequences. The most important of them are: 1). The medium is anisotropic, 2). Its anisotropy can be extreme due to the unboundedness of the harmonic mean, 3). This behavior is strongly dependent on the microscopic geometry of the composite. We offer explicit expressions illustrating the third point below while the first two are discussed after the presentation of the numerical results validating our model. We should note that we have not made any assumption about the losses so, in general, all quantities in 10 are complex.

Eqs. 9 and 10 show that for **H** polarization, light sees the arithmetic mean of epsilon when propagating in the Y direction but the harmonic mean when propagating in the X direction. Let us denote the thicknesses of the two layers h_1 and h_2 (we assume $h_1 + h_2 = 1$ for simplicity) and the corresponding permittivities $\varepsilon_1 = a_1 + ib_1$ and $\varepsilon_2 = a_2 + ib_2$. Rewriting Eq. 10 we have:

$$\varepsilon_X = h_1 \varepsilon_1 + h_2 \varepsilon_2, \quad \varepsilon_Y = \frac{\varepsilon_1 \varepsilon_2}{h_1 \varepsilon_2 + h_2 \varepsilon_1} \quad (11)$$

In this form it is easiest to see how the three main consequences come about. The first one is obtained by setting $\varepsilon_X = \varepsilon_Y$. One quickly arrives at $\varepsilon_1 = \varepsilon_2$ which contradicts our assumptions. The second one is seen by noting that there is nothing preventing the denominator of ε_Y

from approaching zero, ignoring losses. The third results from the prominent role played by the geometrical parameters h_1 and h_2 . Their importance becomes evident as we explore the conditions under which the material is $P \cdot k$ negative.

Maxwell's equations tell us that $P \cdot k = \frac{k_X^2}{\varepsilon_Y} + \frac{k_Y^2}{\varepsilon_X}$ in a uniaxial anisotropic material in $\mathbf{H}$ polarization. Comparing to Eq. 10 we obtain $P \cdot k = k^2 \mu_{\text{eff}}$. The sufficient condition to have a $P \cdot k$ negative material in $\mathbf{H}$ polarization is therefore that the effective permeability be negative. If in addition we require k_X and k_Y to be real (ignoring absorption) for all angles of incidence we must also impose $\varepsilon_X < 0$ and $\varepsilon_Y < 0$. Writing it out explicitly using Eq. 11 we obtain the rather restrictive:

$$\begin{aligned} \frac{h_2}{h_1} < \left| \frac{\varepsilon_2}{\varepsilon_1} \right| < \frac{h_1}{h_2} \text{ when } \varepsilon_1 < 0 \text{ and } \frac{h_2}{h_1} < \frac{h_1}{h_2} \\ \frac{h_1}{h_2} < \left| \frac{\varepsilon_2}{\varepsilon_1} \right| < \frac{h_2}{h_1} \text{ when } \varepsilon_2 < 0 \text{ and } \frac{h_1}{h_2} < \frac{h_2}{h_1}. \end{aligned} \quad (12)$$

The crucial role played here by the purely geometrical quantity h_1/h_2 combines with the unboundedness of ε_Y noted above to explain the critical dependence of the behavior of the composite on the relative spatial placement of its building blocks [11, 12]. Moreover, these relations give, for the first time to our knowledge, a precise geometrical recipe for the conditions under which a composite will exhibit true negative index properties. We believe that, along with Eqs. 10 from which they are derived, they will become useful in the theoretical and especially the experimental study of negative index composites.

We now study the effect of losses on the effective medium. We assume the media are passive ($b > 0$), and that the imaginary parts are comparatively small ($b \ll |a|$) so that we can ignore quadratic terms in b such as $b_1 b_2$, etc. Rearranging 10 we get

$$\begin{aligned} \varepsilon_X &= \langle a \rangle + i \langle b \rangle \\ \varepsilon_Y &= \langle a^{-1} \rangle^{-1} + i \frac{\langle b a^{-2} \rangle}{\langle a^{-1} \rangle^2}. \end{aligned}$$

Let us take a closer look at ε_Y . The real part is the harmonic mean of the real parts of the permittivities of the layers. These permittivities have different signs, and therefore this quantity is not bounded a priori. Let us call it A . Rewriting ε_Y we get

$$\varepsilon_Y = A + i \left\langle \frac{b}{a^2} \right\rangle A^2 \quad (13)$$

The unboundedness of the harmonic mean has a much stronger impact on the imaginary part than on the real part. Eq. 13 is only valid when $\max(b_1, b_2) \ll A^{-1}$. Other cases are of lesser interest as losses dominate.

We now validate our model as formulated in Eq. 10 with numerical simulations. The transmission of the homogeneous anisotropic slab was computed using a 1D transfer (T) matrix method, while for the alternating single negative stack we chose a scattering (S) matrix method for its numerical stability. In what follows all angles and phase differences are measured in degrees while the scale parameter r is dimensionless.

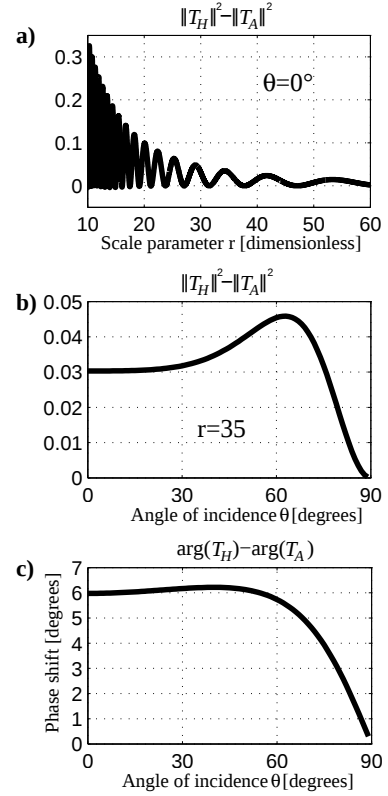


Figure 2: Offset between the power transmission coefficients of single-negative stack ($\|T_A\|^2$) and the equivalent homogeneous medium ($\|T_H\|^2$) as a function of the scale parameter $r = \lambda/d$ for normal incidence (a) and of angle of incidence for $r = 35$ (b). They are within 0.05 of one another for $r > 30$ for all angles of incidence. c) Phase mismatch between the transmission coefficients of single negative stack and effective medium as a function of incidence angle for $r = 35$. They are within 7° of each other for all angles of incidence.

The structure under study is composed of 200 alternating layers of thicknesses $h_1 = 0.4$, $h_2 = 0.6$, with permittivities $\varepsilon_1 = 2$, $\varepsilon_2 = -2.8$ and permeabilities $\mu_1 = -3.295$, $\mu_2 = 0.53$. The equivalent parameters resulting from Eqs. 10 are $\varepsilon_X = -0.4$, $\varepsilon_Y = -70$ and $\mu_{\text{eff}} = -1$. The total thickness of the structure is 100 periods. We now present numerical simulations comparing the transmission coefficient of the 1D alternating layer structure, T_A , to that of the equivalent homogeneous structure, T_H , as a function of r and of angle of incidence.

Figure 2.a) shows the offset between the power transmission coefficients, $\|T_H\|^2 - \|T_A\|^2$, as a function of the scale parameter r for normal incidence. The same offset as a function of angle of incidence appears in Fig. 2.b) for $r = 35$. Finally, in Fig. 2.c) we plot the phase mismatch between the two transmission coefficients as a function of angle of incidence for $r = 35$. These results demonstrate clearly that the meta-material behaves in all respects as a homogeneous medium with the effective

parameters given by Eqs. 10 for periods more than 20 to 30 times smaller than the wavelength.

The behavior at shorter wavelengths can be described by pushing the developments of Eq. 5 to higher orders. The simple effective medium description is then no longer *quantitatively* valid but, interestingly, negative index-like behaviors remain [9]. More precise results in this direction will be presented elsewhere.

We have thus far detailed only the last of the three main consequences of Eq. 10. It is expressed quantitatively in Eqs 11 and 12. We now discuss the first two: that negative index resonator/wire composites are anisotropic and that their anisotropy can become extreme due to the *divergence of the harmonic mean*.

The significance of the anisotropy of the effective medium resides in the difficulty of interpreting experimental data from a single angle of incidence. The method of extracting effective parameters that is most commonly used in the literature [13, 14, 15, 16] may fail when faced with an anisotropic material, particularly when it is in addition indefinite. This aspect points to the need for a new extraction procedure, one that can unambiguously place the sample under study within one of the cases listed by Smith and Schurig [17] at a given frequency. Such a procedure would necessarily involve transmission and phase measurements over *multiple* angles of incidence.

The implications of the second point stretch beyond the anisotropy of resonator/wire composites. Among other things, it tells us that it is possible to realize materials with very large *positive or negative* permittivities or permeabilities using low valued single negative stacks. It also enables a new understanding of enhanced transmission through very thin slits in thick metal screens [18] by

treating them as 1D air/metal stacks, providing a general theoretical framework for the results of Shen et. al [19]. Another promising application is related to plasmon lasing [20, 21]. Our preliminary results show that by stacking thin layers of active material with thick metallic layers it may be possible to use the divergence of the harmonic mean to dramatically enhance the gain of the active material. More precise results and examples will be published elsewhere.

In conclusion, we have argued that, because of the physical nature of the negative permittivity phenomenon in metallic gratings, composites employing them may be simply modeled as 1D single negative stacks. Rows of wires make up effective negative permittivity slabs while rows of resonators (metallic or dielectric) provide the negative permeability. We have shown using a rigorous self-contained homogenization theory that light sees the harmonic mean of the dielectric constant when propagating parallel to the layers. Since the dielectric constant is not positive definite the harmonic mean is not bounded. This remarkable phenomenon, never before pointed out, explains quantitatively the sensitivity of the composites' behavior to their microscopic geometry and provides clear criteria for constructing a true negative index metamaterial. Furthermore, it tells us that it may now be possible to fabricate media with arbitrarily large positive or negative effective parameters using conceptually simple and technologically straightforward 1D single negative stacks. More in depth investigations of the possible applications of this phenomenon are promising directions for further research.

This work was supported by the French RNRT project CRISTEL and by the EU-IST project PHAT 510162.

-
- [1] J. B. Pendry, A. J. Holden, D. J. Robbins, and W. J. Stewart, J. of Phys.-Cond. Matt. **10**, 4785 (1998).
 - [2] J. B. Pendry, A. J. Holden, D. J. Robbins, and W. J. Stewart, IEEE Transactions on Microwave Theory and Techniques **47**, 2075 (1999).
 - [3] A. L. Pokrovsky and A. L. Efros, Phys. Rev. Lett. **89**, 093901 (2002).
 - [4] R. Marques and D. R. Smith, Phys. Rev. Lett. **92**, 059401 (2004).
 - [5] D. Felbacq and G. Bouchitte, Opt. Lett. **30**, 1189 (2005).
 - [6] D. Felbacq and G. Bouchitte, Phys. Rev. Lett. **94**, 183902 (2005).
 - [7] R. Marques, J. Martel, F. Mesa, and F. Medina, Phys. Rev. Lett. **89**, 183901 (2002).
 - [8] A. Alu and N. Engheta, IEEE Transactions on antennas and propagation **51**, 2558 (2003).
 - [9] J. Yoon, S. H. Song, C.-H. Oh, and P.-S. Kim, Optics Express **13**, 417 (2005).
 - [10] K.-Y. Kim, Opt. Lett. **30**, 430 (2005).
 - [11] J. F. Woodley, M. S. Wheeler, and M. Mojahedi, Phys. Rev. E **71**, 066605 (2005).
 - [12] A. A. Zharov, I. V. Shadrivov, and Y. S. Kivshar, Journal of Applied Physics **97**, 113906 (2005).
 - [13] D. Smith, S. Schultz, P. Markos, and C. Soukoulis, Phys. Rev. B **65**, 195104 (2002).
 - [14] R. B. Greigor, C. G. Parazzoli, K. Li, B. E. C. Koltenbah, and M. Tanielian, Optics Express **11**, 688 (2003).
 - [15] K. Aydin, K. Guven, M. Kafesaki, L. Zhang, C. M. Soukoulis, and E. Ozbay, Optics Letters **29**, 2623 (2004).
 - [16] S. Zhang, W. Fan, N. C. Panoiu, K. J. Malloy, R. M. Osgood, and S. R. J. Brueck, Phys. Rev. Lett. **95**, 137404 (2005).
 - [17] D. R. Smith and D. Schurig, Phys. Rev. Lett. **90**, 077405 (2003).
 - [18] J. A. Porto, F. J. Garcia-Vidal, and J. B. Pendry, Phys. Rev. Lett. **83**, 2845 (1999).
 - [19] J. T. Shen, P. B. Catrysse, and S. Fan, Phys. Rev. Lett. **94**, 197401 (2005).
 - [20] C. Sirtori, C. Gmachl, F. Capasso, J. Faist, D. L. Sivco, A. L. Hutchinson, and A. Y. Cho, Optics Letters **23**, 1366 (1998).
 - [21] M. P. Nezhad, K. Tetz, and Y. Fainman, Optics Express **12**, 4072 (2004).